

# BLASTMAN B12S

## ROBOT CONFIGURATION

		Range /m/°	Max. Speed	Type
Axis 1	Main frame horiz.	3 - 50 m	0,3 m/s	Lin.
Axis 2	Shoulder	145°	20°/s	Rot.
Axis 3	Arm head	360°	180°/s	Rot.
Axis 4	Nozzle	270°	215°/s	Rot.
Axis 5	Rotating stand			Ext.

## OPERATION MODES

Manual (External contr. cabin)  
Automatic  
Parameter based automatic

## TEACHING METHODS

Teach In (option with ext. cabin)  
PTP  
Offline (option)  
Parameter based (option)

## OPERATIONAL PARAM.

Nozzle diam.	6 - 19 mm
Nozzle diam.	1/4" - 3/4"
No. Of Nozzles	1 or 2
Air Pressure	4 - 11 bar
Air Pressure	50 - 150 PSI
Cleaning rate	....200 m²/h
Cleaning rate	....2150 ft²/h

## TECHNICAL

Voltage	380-500V 50/60Hz
Contr. voltage	24 VDC
Sealing *	IP65
Assembly	Wall Mounted
Weight **	1500 kg

\*Applies to electrics in the blast room

\*\* Depends on height

## FEATURES

### Control



- License for software updates
- Offline teaching
- VPN connection for remote diagnosis and SW updates
- Mobile monitoring
- Control of the rotating units
- Control of blast room machineries

### Blast equipment

- Complete operational blast room
- Blast pot for robot
- Blast hoses
- Blast nozzles

### Other

- Rails for the robot
- Warranty extension
- Installation services

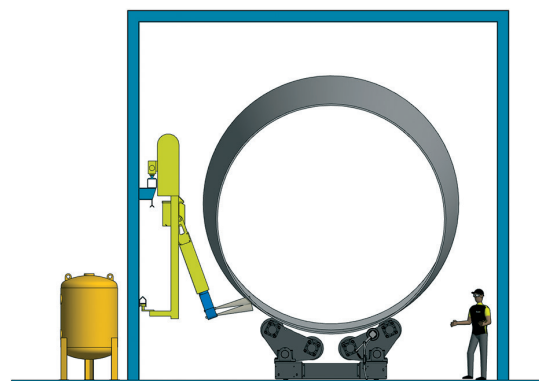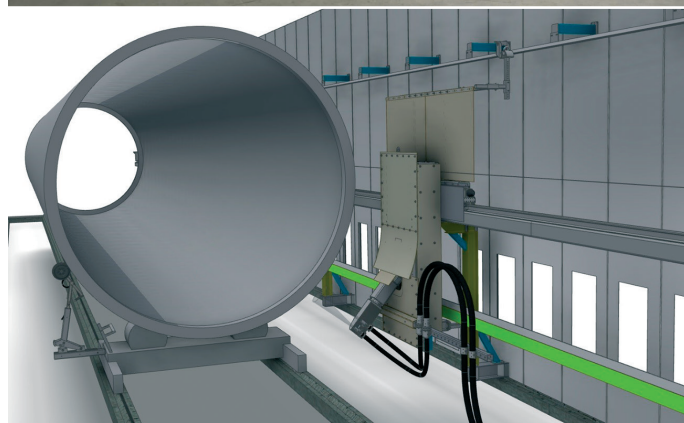

**NOTE:** We reserve right to make technical changes or modify the content of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. Blastman does not accept any responsibility whatsoever for potential error or possible lack of information in this document.